

## DPQLM-1535-C-0040-005N-02-30-000-A


**Key Features:**

Eye-safe Laser Wavelength  
 Internal Photodiode  
 Low Power Consumption  
 Mini Size  
 High Reliability


**Applications:**

Laser Telemeter  
 Laser Surveying  
 Remote Sensing

Model Number	DPQLM-1535-C-0040-005N-02-30-000-A			
Optical Parameters	Specs			Conditions
	Min	Typ	Max	
Wavelength	-	1535nm	-	
Pulse Width	-	5ns	-	
Peak Power	-	8kW	-	
Pulse Repetition Frequency	-	100Hz	-	
Pulse Energy	-	40uJ	-	
Pulse Build-up Time	-	1ms	2ms	
Operating Temperature (Case)	-	-	-30~+50 °C	
Energy Stability	-	2%	5%	100pulses @ constant temp
Beam Diameter	-	6mm	-	At output window
Beam Divergence	-	0.5mrad	1mrad	Full angle, 1/e <sup>2</sup>
Electrical Parameters				
LD Working Current	-	-	3A	Pump Pulse Peak Current
LD Working Voltage	-	2V	2.2V	
LD Pump Pulse Duty Cycle	-	-	40%	
Power Consumption		0.6W	1.2W	
Mechanical Parameters				
Packaging Dimension	Ø16.0mm×60mm			
Off center(Angle)	-	-	20mrad	
Off center(Position)	-	0.3mm	0.5mm	
Reliability				
Storage Humidity	-	5%~85% R.H. <sup>①</sup>	-	
Storage Temperature	-	-40 to +85 °C	-	
Shock	1500g, 0.5ms, 6 shocks, 3 axes, 2 shocks/axis			
Vibration	20~2000Hz, 0.02g <sup>2</sup> /Hz, 3 axes, 1hr/axis			
Expected Lifetime (MTTF)	5000hrs	-	-	@Rated Output & Room Temp.

 Note: <sup>①</sup> Non-condensing

### Dimensions and Pin Configuration (Unit: mm)

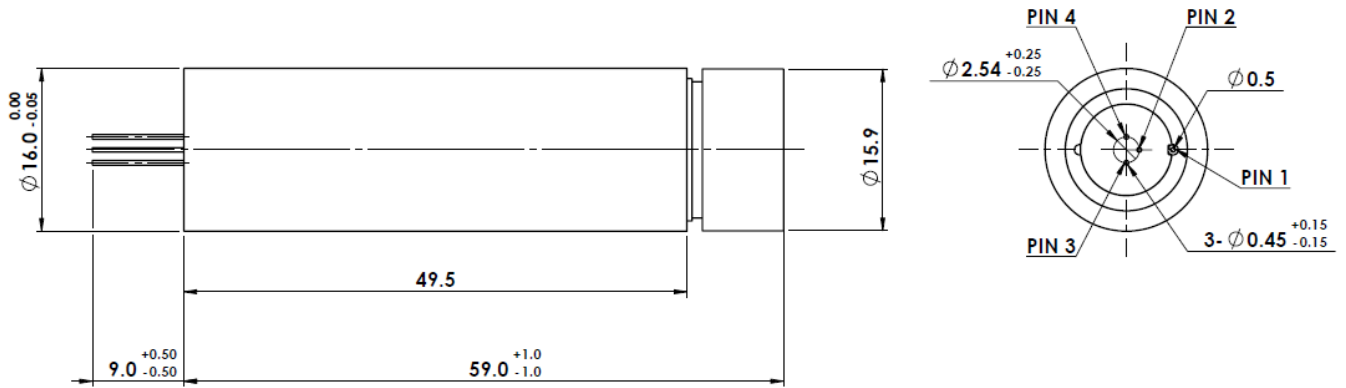

PIN Configuration: 1.PD+ 2.COM\* 3.NA 4.LD-  
 Note: 1.COM\*: LD+ & PD- (conduction with case)  
 2.PD:Laser Pulse detect

