

GDLM-MA-0003-WTA-07-00-A


Key Features:

Mini size
 High Reliability
 Auto Power Control
 Low Power Consumption
 Wide Operating Temperature


Applications:

Surveying Equipment
 Laser Alignment & Pointing

Model Number		GDLM-MA-0003-WTA-07-00-A			
Optical Parameters		Specs			Conditions
		Min	Typ	Max	
Wavelength		531nm	532nm	533nm	
Output Power		3mW	3.3mW	3.6mW	@25°C
Power	2hours @ Constant Temp	-	-	+/-5%	APC
	Stability	Over Operating Temp Range	2mW	-	
Operating Temperature (Case)		0~45°C	-	-	APC
Residual IR		-	-	1%	
Beam Diameter		-	-	60mm	At 30m By eye
Beam Divergence				2.0mrad	Full Angle
Roundness		70%	80%	100%	
Warm Up Time				1s	0~45°C
Electrical Parameters					
LD Working Current		-	240mA ^①	500mA	
LD Working Voltage		-	2.0V	2.2V	
Monitor Current		20uA	-	200uA	3.3mW@25°C
GDLM Power Consumption			0.48W ^①	1.1W	
Mechanical Parameters					
Laser Head	Length	21.0mm	21.3mm	21.6mm	
	Dimensions	Diameter	6.27mm	-	6.3mm
Beam Alignment	Position(Δr)	-	-	0.7mm	At window
	Tolerance	Angle	-	-	17.5mrad
Laser Weight		-	1.23g	-	
Reliability					
Storage Temperature		-	-40 to +85°C	-	
Shock		1500g, 0.5ms, 6 shocks,3 axes, 2 shocks/axis			
Vibration		20~2000Hz, 0.02g2/Hz,3 axes, 1hr/axis			
Expected Lifetime (MTTF)		5000hrs	-	-	@3.3mW & 25°C

Note: ^① Tcase=25°C & P=3.3mW

Dimensions and Pin Configuration (Unit: mm)

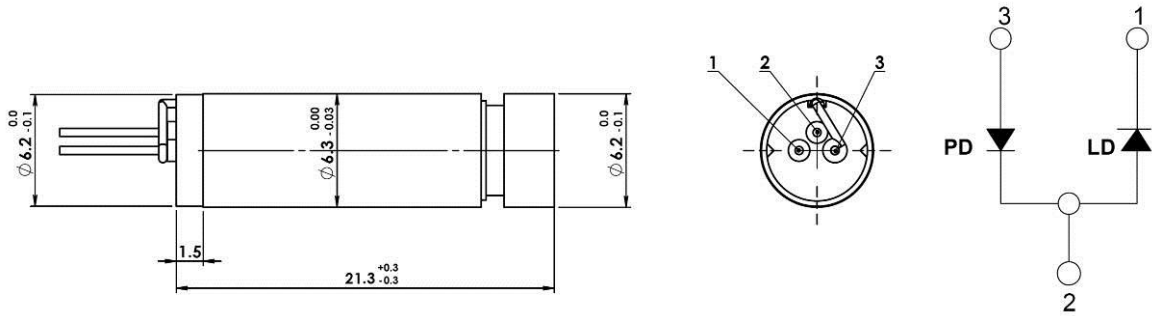

Pin Configurations : 1. LD - 2. LD + ,PD- 3.PD+ (Green cable)